


Tronsmart

User manual

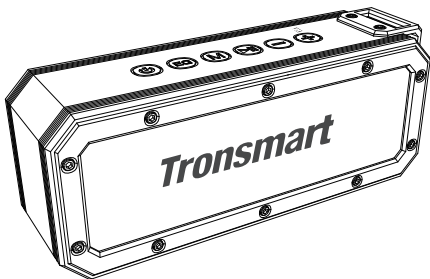

Tronsmart Element Force+

Bluetooth Speaker

Thank you for choosing Tronsmart Element Force+ Bluetooth Speaker. Element Force+ is equipped with Bluetooth 5.0 for optimal connection and pairing with your Bluetooth enabled device. Please read the user manual before use and keep it handy for future reference.

FEATURES

- Silicon covered exterior with IPX7 rating.
- Passive radiator for deeper bass.
- Up to 40W powerful output.
- Up to 15 hours of play time.
- True Wireless Stereo for stereo surround sound.
- Bluetooth 5.0.
- Equipped with USB Type-C port supporting DC 5V/2.4A input charging.
- Supports voice assistant for music streaming, phone calls, weather inquiries and much more.


Note: Voice Assistant is supported by Siri, Google and other local Android voice assistants that run on Samsung, Huawei, Xiaomi and more devices.

PACKAGE CONTENTS

- 1 x Element Force+ Bluetooth speaker
- 1 x Charging cable
- 1 x 3.5mm AUX cable
- 1 x 60cm lanyard
- 1 x Warranty card

BUTTON CONFIGURATIONS

- | | |
|---|---|
| ① Power ON/OFF | ⑦ Charging indicator/
True Wireless Stereo indicator |
| ② Tri-bass effects: Extra Bass,
3D, Standard; True Wireless Stereo | ⑧ Bluetooth indicator |
| ③ Music playing mode/Reset
/Bluetooth disconnect | ⑨ Audio effect switching
indicator |
| ④ Play/Pause/Hands-free
/Voice assistant | ⑩ NFC area |
| ⑤ Volume-/Previous track | ⑪ USB Charging port |
| ⑥ Volume+/Next track | ⑫ Micro SD/TF card slot |
| | ⑬ AUX-in |



FUNCTIONS

	ON/OFF: Hold for 2-3 seconds to Power ON & OFF.
	Hold for 6-8 seconds until the Bluetooth blue indicator goes off to power OFF & ON the speaker forcibly if it is malfunctions.
	Press to switch EQ effects among vocal, deep bass and light music. Note: The default EQ effect is Vocal mode without an indicator; Deep bass is made with a green indicator on while light music with a white indicator on.
	Press to switch music playing mode between Bluetooth, Micro SD/TF and Aux-in.
	Reset: Hold for 5 seconds until a sound prompt is heard to clear the paired devices and reset to factory setting.
	Bluetooth disconnect: Hold for 3 seconds until a sound prompt is heard to disconnect the Bluetooth pairing.
	Play/Pause: During music playing mode, press to play and pause the music.
	Answer/Hang up a phone call: During an incoming call, press to answer or hang up the phone call.
	Reject a phone call: Hold for 2 seconds to reject the incoming call.

	Redial: During Bluetooth connected mode, double press quickly to redial the last dialed number.
	Voice assistant: After your device is paired to the speaker over Bluetooth, hold the play/pause button for 2 seconds to activate voice assistant.
	Press to lower down the volume.
	Hold to choose previous track.
	Press to increase the volume.
	Hold to choose next track.

SPECIFICATIONS

Model	Element Force+
Bluetooth	5.0
Transmission range	20m/66ft (open area)
Waterproof	IPX7
Output	2 x 20W Max.
Playtime	Up to 15 hours (medium volume)
Power supply	DC 5V/2.4A max.
Battery capacity	3300mAh*2
Charging time	About 3 hours
Standby	About 24 months
Loudspeaker size	53mm
Distortion	≤1.0%
Frequency	80Hz-18KHz
Functions	Micro SD/TF card, aux-in, hands-free
Dimension	209 x 64 x 83mm / 8.22 x 2.51 x 3.26in
Product weight	667 ± 5g / 23.52 ±0.2 oz

BLUETOOTH

Turn ON the speaker and wait for the blue LED light to flash and then activate the Bluetooth in your device. Go to device's Bluetooth settings, scan for new Bluetooth devices and upon discovering the device 'Tronsmart Element Force+' click to pair with it. Hold the 'M' button for 3 seconds to disconnect the Bluetooth.

True Wireless Stereo MODE

What is True Wireless Stereo?

True Wireless Stereo which means two Force+ Bluetooth speakers are able to be paired to play music simultaneously to provide stereo surround sound.

How to pair two Force+ speakers?

1. Turn ON two speakers and confirm they are disconnected to any Bluetooth device.

2. Hold EQ button for 2 seconds on one speaker, then you will hear a voice prompt which means it has entered True Wireless Stereo pairing mode and will pair with each other automatically. After connecting successfully, you will hear a sound prompt from two speakers and the blue LED light of main speaker flashes slowly while the blue light of sub-speaker goes off. Both True Wireless Stereo indicators are steady ON yellow.

3. Go to device's Bluetooth settings, scan for 'Tronsmart Element Force+' and click to pair with it. The blue light of main speaker being steady ON means the connection to Bluetooth device is successful. And then start to play music to enjoy stereo surround sound.

4. If the speaker used to be paired in True Wireless Stereo mode, it is suggested to hold the Mode button for 5-7 seconds to reset the speaker. Then restart to pair another new Element Force+ speaker according to the above instructions.

Note:

1. Once the speakers are paired for the first time they will be automatically paired next time without the above pairing operations as long as they are ON.
2. During True Wireless Stereo mode, only the main speaker can perform hands-free function.

How to connect the speaker to Amazon Echo/Echo Dot?

1. Login the Alexa App, and finish the setting of the Echo/Echo Dot (if you haven't set it up).
2. Connect the Echo/Echo Dot to WiFi successfully.
3. Then tap "Home / Settings / Your Echo's (Echo Dot's) Name / Bluetooth / Pair A New Device". You will get to the interface "Bluetooth Setup", and see the reminder "Please make sure your device is in pairing mode". Find and tap "Tronsmart Element Force+" from the list and wait for the pairing process complete. After completed, you can command your speaker via Alexa.

Note: Confirm you have turned on the speaker and it is under Bluetooth searching and pairing mode, or you can not find the device on the Bluetooth list.

AUX-IN MODE

The speaker also features one AUX audio in port. Simply connect the speaker with your mobile phone/MP3 player/PC/laptop with the 3.5mm audio jack cable. Once the blue light is steady on, then you can play music via the wired connection.

MICRO SD/TF CARD MODE

Press the Mode button to switch Bluetooth Mode to Micro SD/TF card Mode. It supports WAV/FLAC/APE/MP3 audio formats.

NFC MODE

Confirm Bluetooth & NFC function are enabled on your mobile device and then put it on the NFC area of the Force+ speaker to pair automatically. If your mobile phone prompts you to choose whether to accept the speaker connecting to your phone or not, please choose 'accept' to make it pair with the speaker. Once paired successfully, you can take away your phone and enjoy the music from the speaker. Put your phone back to the NFC area again to disconnect NFC pairing mode.

LED

Bluetooth: Blue light flashes slowly for pairing. Blue light kept ON for connected successfully.

Micro SD/TF & AUX-IN: Blue light flashes slowly.

Charging: Red light ON for charging. Red light goes OFF for charging completion.

True Wireless Stereo: Yellow light kept ON.

RESET

Hold the Mode button for 5 seconds until a sound prompt is heard to reset to factory setting if the speaker malfunctions. It can help to clear all pairing records from the speaker. After resetting you need to connect it to your Bluetooth device manually like the first time you did.

SLEEP MODE

The Force+ speaker will go into Sleep Mode after 10 minutes to save battery power if it does not pair with any device through Bluetooth. When you need to use it, press the Power ON/OFF button to turn it on.

TIPS

Because of the powerful output of this speaker, please do not be too close to the speaker and keep an appropriate distance away to listen to the music. To avoid any discomfort caused by excessive sound, it is recommended to listen to music at a suitable volume.

CAUTION

RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO INSTRUCTIONS.

To prevent possible hearing damage, do not listen at high volume levels for long periods.

FCC STATEMENT

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more

of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

CARE & MAINTENANCE

Please keep this manual handy for future reference. To clean the Tronsmart Element Force+ Bluetooth Speaker use a lightly dampened cloth in water to clean the exterior in-case it gets dirty. Do not use any form of detergents or cleaning material to clean the product as any type of chemical may make this device unusable. Do not disassemble this product. It contains no user serviceable parts. Do not drop or jump on it and treat it with care for the best performance. Keep the product in a dry location. Dust, dirt & moisture from humidity can accumulate on the body of the product if kept at an unfriendly place. Do not dispose this product in fire, batteries may explode or leak.

WARRANTY INFORMATION

Your 'Tronsmart Element Force+ Bluetooth Speaker' is

warranted to the original owner for 12 months from the date of purchase against defects in material and workmanship under normal use and service. Should the product prove defective within 12 months from the date of purchase, return the defective part or unit, freight prepaid along with an explanation of the claim. Please pack the product carefully to avoid damages in transit. Under this warranty, Tronsmart will repair or replace any parts found to be defective due to manufacturer's defect. This warranty extends only to personal use and does not extend to any product that has been used for commercial use, rental use, or use which is not intended. There are no warranties other than that expressly set forth herein. This warranty is not transferable. Tronsmart is not responsible in any way for damages, losses or inconveniences caused by equipment with the 'User Manual' or any additional safety, use, or warnings included in the product materials. Further, Tronsmart is not liable for incidental use of this product and any liability shall not exceed the purchase price of the product. This Warranty gives you specific legal rights. You may also have other rights which vary from state to state.

THIS WARRANTY DOES NOT APPLY TO THE FOLLOWING

Damage due to accident, misuse, abuse, alterations or vandalism.

Improper or inadequate maintenance.

Unauthorized modifications or commercial use.

Damage in return transit.

Unsupervised use by children under 18 years of age.

(Tronsmart and its subsidiaries assume no liability for damage caused by the use of the Element Force+ Bluetooth Speaker other than for its intended use or as instructed above in the User Manual.)



SHENZHEN VALUE IN ACTION TECHNOLOGY CO., LTD.

A3 Hekan Industrial Building, 41# Wuhe Str,
Bantian, Longgang District, 518129 Shenzhen, China

Email: support@tronsmart.com

800-270-1082 (USA & Canada)

+86-755-23603740 (Global)



www.tronsmart.com